SOUND LIVE

DIVOOM®

xFORCE-1

2.1 Ses Sistemi

Kullanma Kılavuzu

www.divoom.com.tr

ÖNEMLİ GÜVENLİK BİLGİLERİ



ELEKTRİK ŞOKU TEHLİKE UYARISI

* Lütfen talimatları okuyunuz ve saklayınız.
* Uyarılara dikkat ediniz.
* Tüm talimatları dikkate alınız.
* Cihazı çalıştırmadan önce cihaz üzerinde oluşan tozlanmaları siliniz.
* Üretici firmanın talimatları doğrultusunda bağlantılarını yapınız.
* Hoparlörleri zarar gelmeyecek ve düşemeyecekleri uygun bir yere koyunuz.
* Hoparlörleri suya yakın yerlerde kullanmayınız ve nemli ortamlarda bırakmayınız.
* Hoparlör deliklerine herhangi bir cisim sokmayınız, Elektrik çarpması riski doğabilir, ve uygun havalandırma şartları için hoparlörlerin çevresinde yeterli boş alan sağlayınız.
* Kalorifer, soba, gibi cihazların yakınında asla hoparlör sisteminizi kurmayınız.
* Hoparlörleri sadece bilgisayarın veya ses aygıtının ses hattı çıkışından çalıştırınız.
* Güç kablosunun ayak altında olmamasına dikkat ediniz.
* Sadece imalatçı tarafından verilen aksesuarları kullanınız.

* Daha fazla koruma için hoparlörleri elektrik prizinden çıkarmadan once bilgisayarınızı kapatın.
* Sistem uzun zaman kullanılmayacaksa, lütfen enerji kablosunu prizden çıkartınız.
* Herhangi bir yolla sistemin zarar görmesi; güç kaynağı kablosu veya fişinin zarar görmesi, sıvı dökülmesi veya cisimlerin içeri düşmesi, nem tutması cihazın normal çalışmasını veya bozulmasına neden olabilir.
* Tüm bakım onarımının nitelikli personel tarafından yapılması önerilir.
* Yanan mum gibi yanıcı kaynakları sisteme yaklaştırmayınız.
* Priz Sistemi yakınında olmalı ve kolay erişilebilir olmalıdır.
* Ürün tasarımı ve özellikleri bildirime gerek duymaksınız değiştirilebilir. Bu özelliklere ürün ana özellikleri, yazılım, yazılım sürücüleri ve kullanım kılavuzu dahildir. Bu kullanım kılavuzu ürün için genel bir başvuru rehberidir.

UYARI:

ELEKTRİK ŞOKU RİSKİNİ AZALTMAK İÇİN SİSTEMİ, YAĞMURLU YADA NEMLİ ORTAMLARDA AÇMAYINIZ.

Xforce-1 ses sistemini satın aldığınız için Teşekkür Ederiz.
Xforce-1 ses sistemi yüksek performanslı ses sistemidir ve kullanımı kolaydır. DIVOOM ürünleri hakkında veya Xforce-1 hakkındaki sorularınız için , Lütfen www.divoom.com.tr adresini ziyaret ediniz.

A

Ön

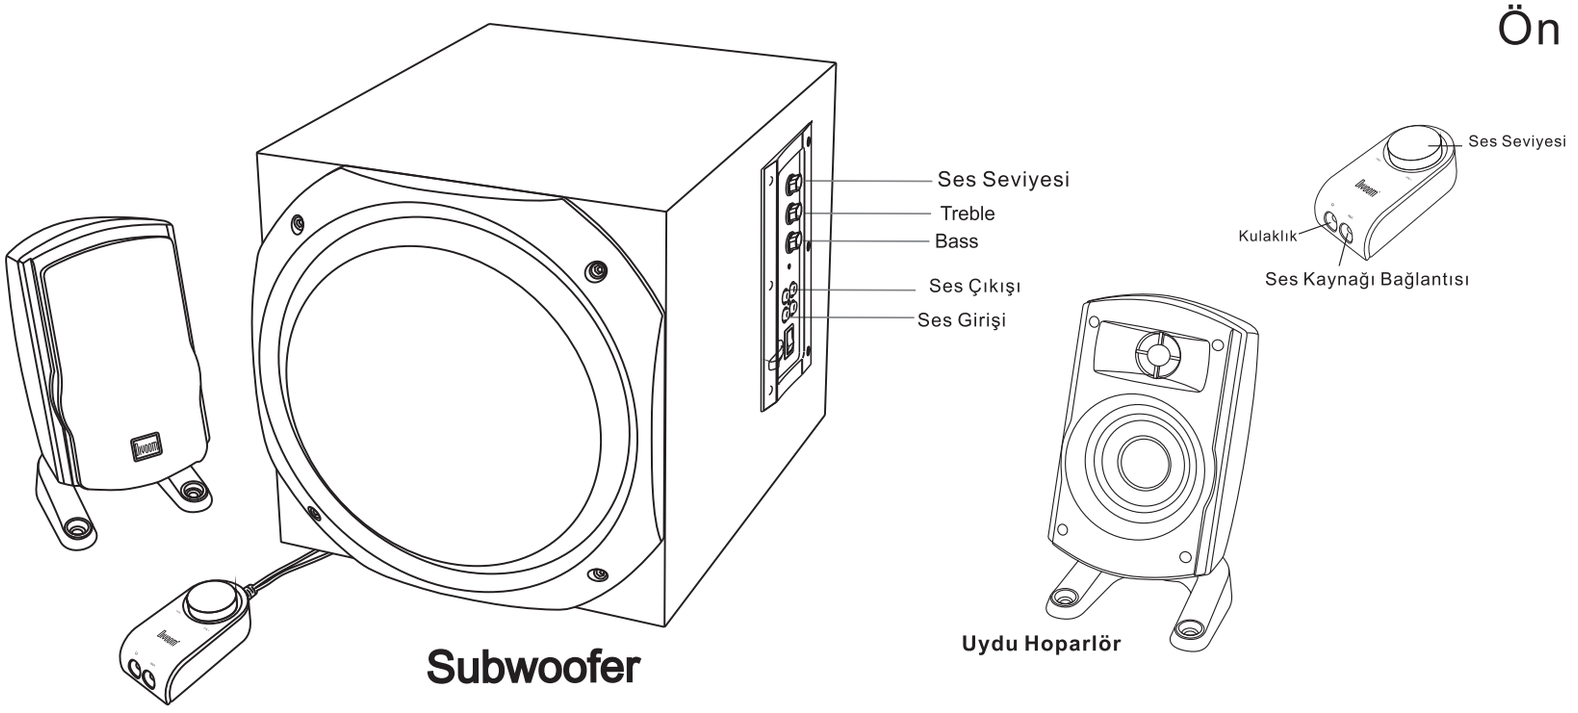

B

Subwoofer Bağlantısı

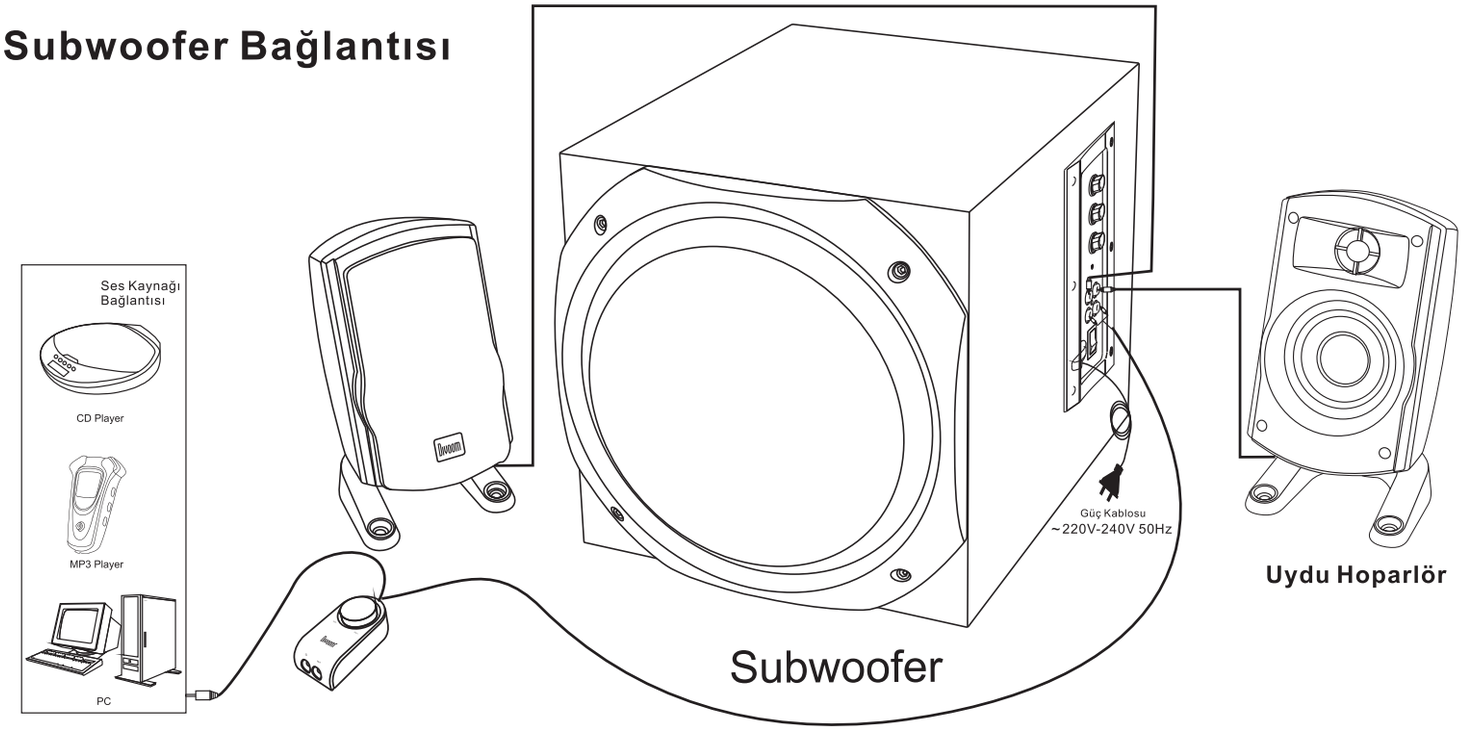

DIVOOM X-FORCE-1 Ses sistemini kurmak:

Önemli: Güvenliğiniz için, elektrik prizine takmadan önce hoparlör sistemini kurunuz..

1. Subwoofer bağlantılarını yapmadan önce, ön uydu haparlörleri monitörün her iki yanına koyunuz. Sağ ön hoparlör sisteminiz için merkez kontrolü yapar, dolayısıyla onu kolar erişebileceğiniz bir yere koyunuz.Hoparlör sisteminizi nasıl kurduğunuza bağlı olarak, onları sesin size doğru gelebilecek sekilde yerleştiriniz. Gerçek ses kalitesi için, subwoofer'ı masanızın altına yerlerştirebilirsiniz. Subwoofer'ın yeterli hava sürkilasyonu yapabilmesi için çevresin de yeterli boş alan olduğuna emin olunuz.

2. Uydu hoparlörleri, subwoofer'a bir önceki sayfada gösterildiği bağlantılarını gerçekleştiriniz.

3.A. Bilgisayarınız varsa :

Subwoofer daki ses giriş kablosunu bilgisayarın ses çıkışına bağlayınız.

B. Eger video oyun konsoluna sahipseniz (PlayStation ®, PlayStation (R) 2, Xbox(TM), or GameCube(R)):

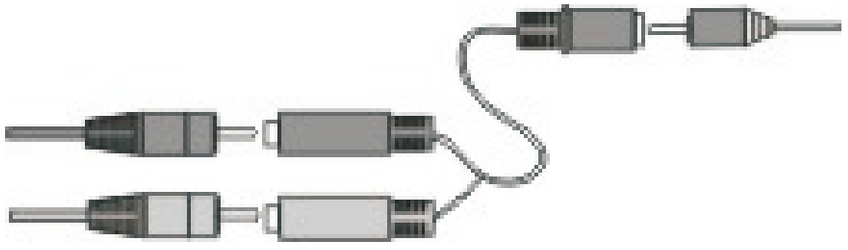

a. Konsol oyunları için Y-adaptörune ihtiyacınız war.oyun konsolundaki Kırmızı ve beyaz RCA kablosuna uygun gelen Kırmızı ve beyaz RCA jaklarına bağlayınız.

b. Oyun Y-adaptörü.
Subwoofer' a bağlı olan 3.5mm stereo kabloyu, konsolun yeşil girişine bağlayınız.

C. Eğer DVD/VCD oynatıcınız varsa:

a. çiftli RCA kablosuna ihtiyacınız var. (genel olatak DVD/VCD oynatıcınızla verilmektedir.) kırmızı ve beyaz RCA kablosunu , oynatıcının çıkış jaklarına bağlayınız.

b. çiftli RCA kablosunun diğer ucunu subwoffer ın ses girişine bağlayınız.

4. Subwoofer' ın elektrik kablosunu, elektrik prizine bağlayınız.

DIVOOM XForce-1 Ses sistemi kullanımı

Bu kontrollöre Subwoofer üzerinden ulaşılır:

Açma/Kapama

Subwoofer arkasında bulunur, sisteme enerji verildiğinde mavi ışık göstergesi yanacaktır.

Sistem ses kontrolü

Subwoofer üzerinde yer alır, Sistemin tüm ses kontrolünü ayarlar.

Subwoofer ses kontrolü

Subwoofer üzerinde yer alır, subwoofer ses ayarını ayarlamak için vkullanılır(bas seviyesi).

Tiz Ses Ayarı

Subwoofer üzerinde yer alır, Tiz' i ayarlamak için kullanılır.

Kablolu uzaktan kumanda:

Ses kontrolü için üzerindeki butonu çevirerek sesi arttırıp/azalttabilirsiniz.

MP3 sinyal girişi, kulaklık jakı.

Teknik Özellikler

* Toplam Güç (RMS) : 60 Watt
  Subwoofer : 30 Watt (RMS), 4Ω (100Hz),
  10% THD (Toplam Harmonik Sapma)
  Uydu hoparlör : 30 Watt RMS (2 x 20W), 4Ω (1kHz),
  10% THD (Toplam Harmonik Sapma)
* Toplam Peak Güç : 120 Watt (<10% THD)
* Sistem THD : 0.05% dan daha iyi
* Sinyal/Gürültü Oranı :>80 dB
* Frekans Aralığı : 20Hz – 20kHz
* Hoparlör Boyutları
  Uydu hoparlör : 100D x 105W x 180H(mm)
  Subwoofer :230U x 255G x 210 Y (mm)
* Güç kaynağı : 220V~240V AC 50/60Hz

CİHAZIN KULLANIM ÖMRÜ 10 YILDIR.

CE

Üretici Firma
AYYILDIZ ELEKTRİKLİ EV EŞYALARI İMALAT VE PAZARLAMA A.Ş.
Adres: Halkalı cad. No:228 Sefaköy-İstanbul-Türkiye
Fax : 0212 6930224
Web : www.goldmaster.com.tr E-mail : info@goldmaster.com.tr

IMPORTANT SAFETY INFORMATION

CAUTION ELECTRIC SHOCK HAZARD

- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Unplug the speakers from the computer and from the electrical outlet before cleaning them With a dry cloth.
- Install in accordance with the manufacturer's instructions.
- Place the speakers in a stable location so they will not fall causing damage to the speakers or bodily harm
- Do not use the speakers near water, and do not immerse them in any liquid or pour any liquid on them.
- Do not block the openings in the speaker cabinets, never push objects into speaker vents or slots because of fire or electric shock hazards, and provide sufficient space around the speakers for proper ventilation.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Do not defeat the safety purpose of the polarized plug. A polarized plug has two blades with one wider than the other. The wide blade is provided for your safety. If the provide plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- Operate the speakers only from the low level audio line out jack of the computer or of an audio device.
- Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- Only use attachments/accessories specified by the manufacturer.
- For added protection during lighting storms, unplug the speakers from the electrical outlet and turn off the computer.
- Unplug this apparatus when unused for long periods of time.
- Servicing is required when the apparatus has been damaged in any way,such as when the power-supply cord or plug has been damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- Refer all servicing to qualified service personnel.
- The speakers should be disconnected from the mains by placing the power/standby switch in the standby position and unplugging the power cord of the speakers from the AC mains receptacle.
- Do not place any form of open flame source, such as lighted candles, on the apparatus.
- The socket-outlet shall be installed near the equipment and shall be readily accessible.

WARNING:

TO REDUCE THE RISK OF ELECTRIC SHOCK,DO NOT EXPOSE THIS APPARATUS TO RAIN OR MOISTURE.

Thank you for purchasing the Xforce-1 speaker system from DIVOOM. Your Xforce-1 speakers produce great sound and are easy to use. To discover more DIVOOM Products, or if you have questions about your Xforce-1 speaker, visit us on the web at www.divoom.com.

A

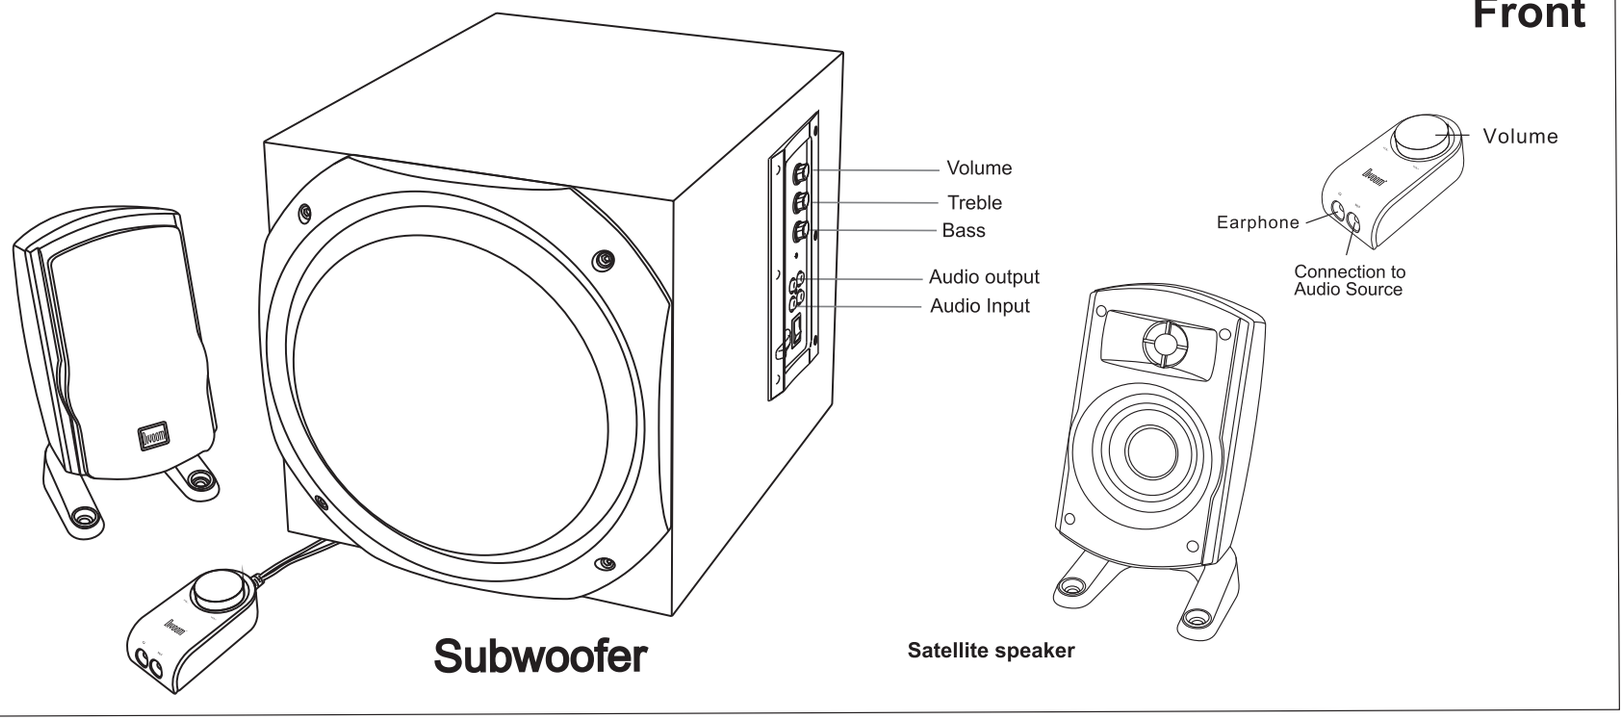

B

Subwoofer Connection

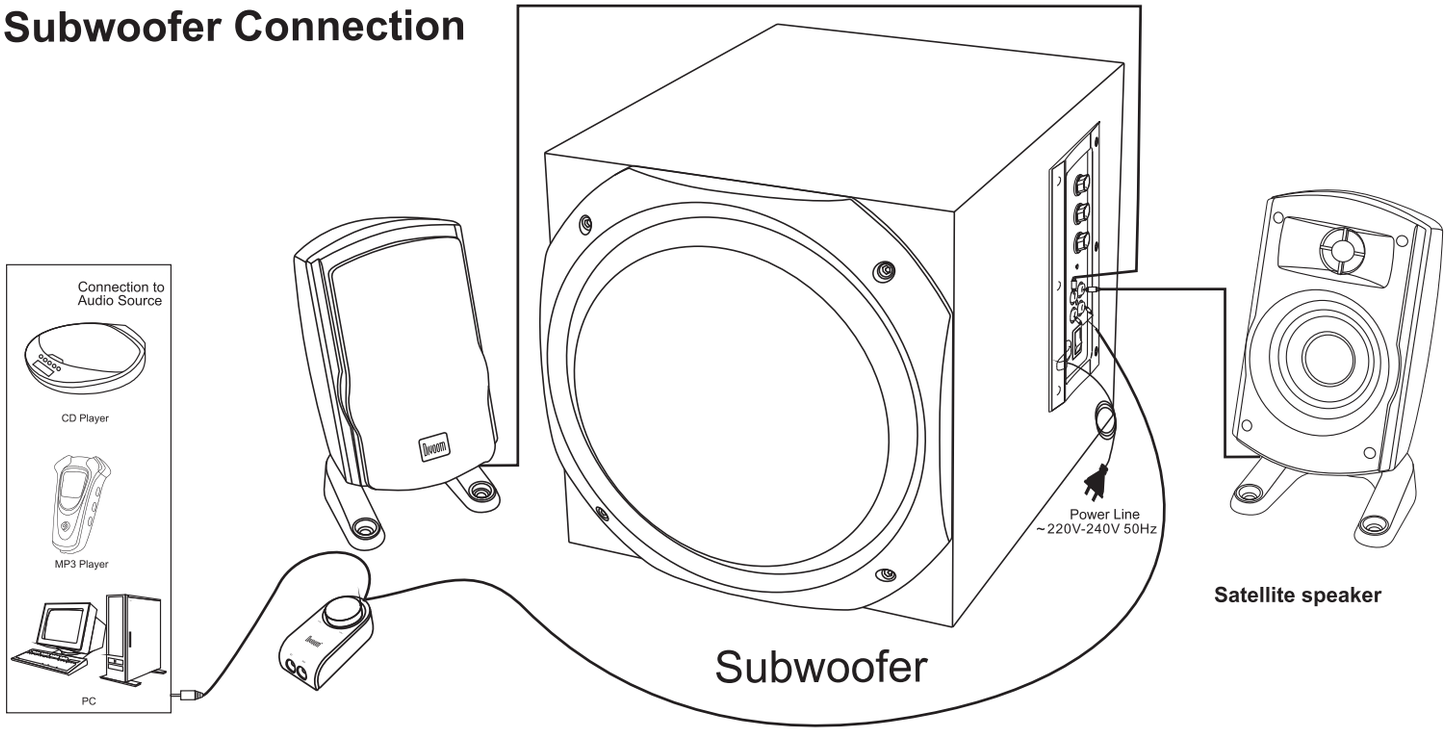

Setting up your DIVOOM XFORCE-1 speakers

Important: For your safety, set up the system before plugging it into a power source.

1.Before attaching the cables to the subwoofer , position the two front satellite speakers on either side of your monitor. Depending on where you place your speakers, adjust them to direct the sound toward you.For best sound quality, place the subwoofer on the floor beneath your desk. Be sure to maintain at least 6 inches of spacing around the subwoofer to allow for adequate ventilation.

2.Connect the satellite speakers to the subwoofer as shown on the previous page.

3.A.If you have a PC:
Plug the audio input cable from the subwoofer into the speaker output on your PC(picture)

B.If you have a video game console (PlayStation®, PlayStation® 2, Xbox™, or GameCube®):

- Requires the Console Gaming Y-adapter(sold separately). Connect the red and white RCA cable that came with your console gaming system to the matching red and white RCA jacks on the Console
- Gaming Y-adapter.
  Connect the 3.5 mm Stereo Cable connected with Subwoofer to the lime green input on the Console
- Gaming Y-Adapter.

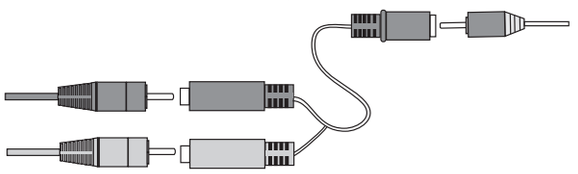

C. If you have a DVD/VCD player:
Requires a dual-RCA cable(normally provided with DVD/VCD player). Connect the red and white RCA Cable to the output Jacks on the players.
Connect another end of Dual-RCA cable to the Audio input Jack on Subwoofer.

4. Plug the subwoofer's power cord into an electrical outlet.

Enjoying your DIVOOM XFORCE-1 speakers

Access these controls:

Power On/off -- Located on the back of subwoofer, use to turn on/off the power with blue indicator.

System Volume -- Located on the subwoofer, Use to adjusts the overall system volume.

Subwoofer Volume -- Located on the subwoofer. Use to adjust subwoofer volume(bass level).

Treble Volume -- Located on the subwoofer , Use to adjust treble volume.

Wired controller functions:

Volume control-rotate to the butoon to increase/decrease the volume

Earphone Jack.

Mp3 signal Jack

Specifications

- Total RMS Power : 60Watts
  Subwoofer : 30 Watts RMS into 4ohms at 100Hz at 10% THD (total harmonic distortion)
  Satellites : 30Watts RMS(2x15w) into 4ohms at 1kHz at 10% THD(total harmonic distortion)
- Total Peak Power : 120Watts at<10% THD
- System THD : Better than 0.05% THD before clipping
- Signal to noise ratio : >80dB
- Frequency response : 20Hz-20kHz
- Driver Size : 3 in full range + 1 in tweeter/channel, 5.25 in long-throw subwoofer
- Speaker dimensions
- Satellites : 100D x 105W x 180H(mm)
- Subwoofer : 230D x 255W x 210h(mm)

  Power supply : 220-240V AC 50Hz

Limited Warranty

Divoom warrants that any hardware product accompanying this documentation shall be free from significant defects in material and workmanship for a period of (1) year from the date of purchase .Divoom's limited warranty is nontransferable and is limited to the original purchaser.This warranty gives you specific legal rights,and you may also have other rights which vary under local laws.

Remedies. Divoom's entire liability and your exclusive remedy for any breach of warranty shall be,at Divoom's option,to: (a) repair or replace the hardware ,provided that the hardware is returned to the point of purchase or such other place as Divoom may direct, with a copy of the sales receipt, or (b) refund the price paid. Any replacement hardware will be warranted for the remainder of the original warranty period or thirty(30) days, whichever is longer. These remedies are viod if failure of the hardware will be warranted for remainder of the original warranty period or thirty(30) days, whichever is longer. These remedies are void if failure of the hardware has resulted from accident, abuse,or misapplication, or any unauthorized repair, modification or disassembly. Upon request from Divoom, you must prove the date of original purchase of the hardware by a dated bill of sale or dated itemized receipt.

Disclaimer of warranty. the warranties expressly set forth in this agreement replace all other warranties. Divoom and its suppliers expressly disclaim all other warranties including, but not limited to, the warranties of merchantability and fitness for a fitness for a particular purpose and noninfringement of third-party rights with respect to the HARDWARE. No Divoom dealer, agent, or employee is authorized to make any modification, extension, or addition to this warranty. Some jurisdictions do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

Limitation of liability.In no event will Divoom or its suppliers be liable for any cost of procurement of substitute products or services, lost profits, loss of information or data, or any other special, indirect , consequential, or incidental damages arising in any way out of the sale of, use of , or inability to use any Divoom product or service, even if Divoom has been advised of the possibility of such damages. In no case shall Divoom's and its supplier's total liability exceed the actual money paid for the Divoom product or service giving rise to the liability. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.The above limitations will not apply in case of personal injury where and do the extent that applicable law requires such liability.

All right reserved.Divoom, the Divoom logo , and other Divoom marks are owned by Divoom and may be registered.
All other trademarks are the property of their respective owners. Divoom assumes no responsibility for any errors that may appear in this manual. Information contained herein is subject to change without notice.

Divoom®

SOUND REALIZED EXPERIENCE

All rights Reserved, Powered by Divoom technology co., Ltd. Copyright protected by international copyright law.
Divoom is a registered trademark of Divoom Technology Co.,Ltd, And all other trademarks are the property of their respective owners.
Engineered in Singapore, Made In China.